



**AGROSERVIS
PROIZVODNJA**
d.o.o. • VIROVITICA

PRODUCT CATALOGUE

**HIGHEST POSSIBLE QUALITY
AT THE LOWEST POSSIBLE PRICE**

MACHINE CATALOGUE



ABOUT US	4
----------------	---

MACHINES FOR VEGETABLES

BED SHAPER (BED FORMING) MACHINE	7
MULCH FOIL LAYING MACHINE	9
BED SHAPER - FOIL LAYING MACHINE	11
DISC PLANTING MACHINE.....	13
ON FOIL TRANSPLANTING MACHINE	15
POTATO PLANTING MACHINE	17
MULCH FOIL LIFTING MACHINE	19
MULCH FOIL REMOVING MACHINE	21
GARDEN SUBSOILER MACHINE	23
ROOT VEGETABLE DIGGER MACHINE	25

SOIL TREATMENT MACHINERY

DISC HARROW MACHINE	29
CRUST BREAKING CULTIVATOR.....	33
SUBSOILERS.....	35
GRUBER COMPACT CULTIVATOR.....	37
SPRING TOOTH HARROW MACHINE.....	39
SPIKE HARROW	45

MACHINES FOR HERBS AND TOBACCO

HEMP HARVESTING HEADER	49
SPIKE HARROW	51
ADAPTATION OF CHAMOMILE HARVESTER.....	53
TOBACCO BED SHAPER	55
ROTOCULTIVATOR WEEDER MACHINE.....	57

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINES FOR FERTILIZATION AND PROTECTION

LIME SPREADING MACHINE.....	61
ROW CROP CULTIVATOR.....	63
SPRING TOOTH ROW CROP CULTIVATOR	65
PUMPKIN CULTIVATOR	67
FERTILIZER SPREADER	69

OTHER AGRICULTURAL MACHINES

MULCHER SHREDDER / FLAIL MOWER	73
ROTARY MULCHER / ROTARY MOWER.....	75
CARDAN SHAFT CIRCULAR WOOD SAW	77
TRACTOR SNOW PLOUGH.....	79
TRACTOR GRADER.....	81

GREENHOUSE CONSTRUCTIONS

GREENHOUSE CONSTRUCTION OF 8 m OF WIDTH.....	85
GREENHOUSE CONSTRUCTION OF 6 m OF WIDTH.....	87
GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH - elevated.....	89
GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH.....	91
LIGHT GREENHOUSE CONSTRUCTION FOR STRAWBERRIES.....	93
LIGHT GREENHOUSE CONSTRUCTION – ELEVATED - FOR RASPBERRIES.....	95
GREENHOUSE CONSTRUCTION OF 3 m OF WIDTH.....	97
GREENHOUSE CONSTRUCTION OF 2,5 m OF WIDTH.....	99

ABOUT US

Agroservis proizvodnja d.o.o. was founded in 1996. in Virovitica, Croatia. We have respectable production and storage space as well as diverse and universal machinery for cold working of metal. Our employees are experienced and highly qualified which results with wide range of product company is manufacturing.

One of our main business goals is accomplishing high productivity as well as high level of quality of products and services to become recognised as manufacturer with reasonable prices of high quality products and services. Because of that we are constantly expanding on new markets and widening range of products we are producing.



According to results of market research we developed production of wide range of agricultural machinery:

- complete line of machinery for cultivation and drying of tobacco
- line of machines for vegetables
- agricultural transporters
- other machines
- municipal equipment
- production of parts by sample
- steel constructions
- cutting, bending and welding services

We're proud to present to our customers over 10 000 different products

Our team of engineers continuously widens range of our products and we are prepared to urgently answer to any of custom demand.



All of our machines are produced in Croatia, and they are of Croatian and of European origin and they comply with wide range of sale and post-sale criteria and obligations that are we, as manufacturer (and also as seller) willing and obligated to comply.




*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.



**AGROSERVIS
PROIZVODNJA**
d.o.o. • VIROVITICA

MACHINE CATALOGUE

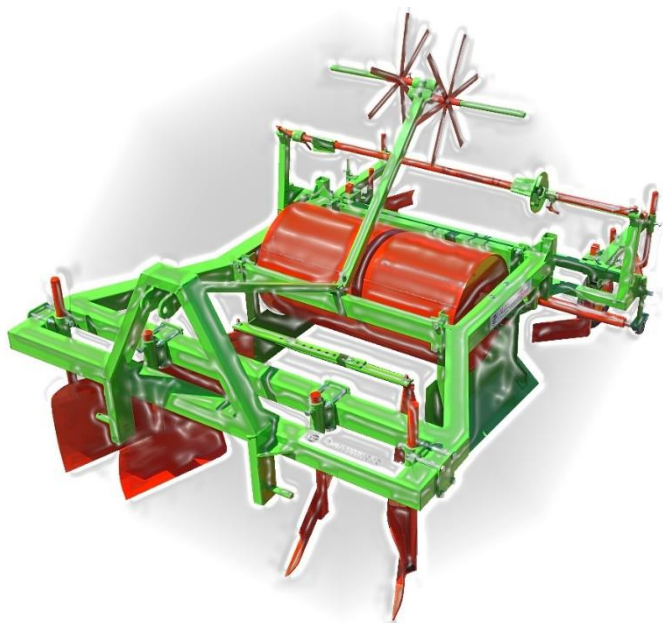

MACHINES FOR VEGETABLES



*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE




BED SHAPER (BED FORMING) MACHINE	7
MULCH FOIL LAYING MACHINE	9
BED SHAPER - FOIL LAYING MACHINE	11
DISC PLANTING MACHINE.....	13
ON FOIL TRANSPLANTING MACHINE	15
POTATO PLANTING MACHINE	17
MULCH FOIL LIFTING MACHINE	19
MULCH FOIL REMOVING MACHINE	21
GARDEN SUBSOILER MACHINE.....	23
ROOT VEGETABLE DIGGER MACHINE	25

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

BED SHAPER (BED FORMING) MACHINE

model BS

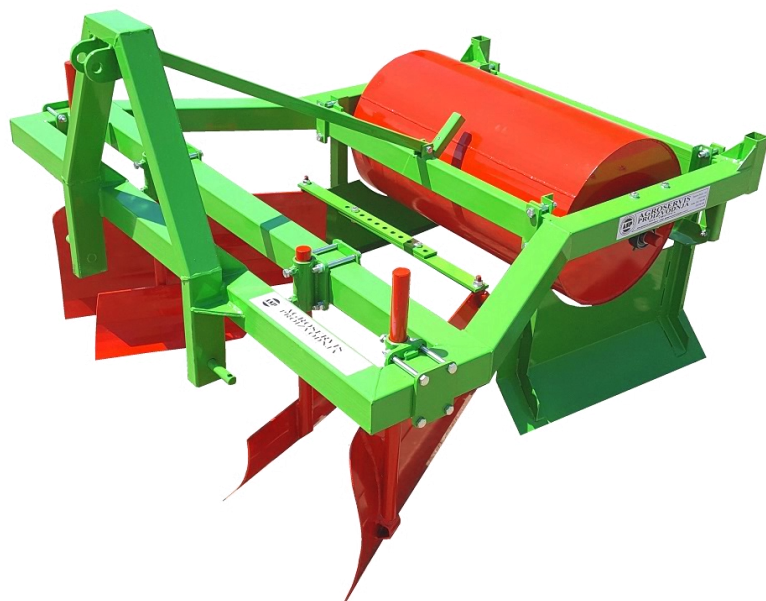

MODEL BSCR9040

purpose of the machine

- forming of bed in which plants will be planted

machine properties

- adjustable working width up to 900 mm (the version no. BSxR12020 has adjustable working width up to 1200 mm)
- adjustable working height up to 200 mm (the version no. BSxR9040 has adjustable working height up to 400 mm)

Working principle

1. Front shares gather loose soil and form the bed, lateral shares gather soil and central shares fill the middle of bed.
2. Soil containment sides set up soil gathered by the front shares.
3. Pressing roller compact soil and forms top of the bed.

Machine versions:

1. BSxR9020 – bed sharper machine standard*
2. BSxR9040 – bed sharper machine increased*
3. BSxR12020 – bed sharper machine broadened*

*In each version there is a possibility of choice between V shaped and cylindrical roller

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: BED SHAPER MACHINE

Model	Max bed width (cm)	Max bed height (cm)	Min required power (kW)	Machine weight (kg)
MODEL WITH CYLINDRIC ROLLER				
BSCR9020	90	20	30-35	150
BSCR9040	90	40	35-40	165
BSCR12015	120	15	40 – 45	215
MODEL WITH V-SHAPED ROLLER				
BSVR9020	90	20	30-35	150
BSVR9040	90	40	35-40	165
BSVR12015	120	15	40 – 45	215

ADDITIONAL EQUIPMENT

Fertilize attachment (displayed on picture A)

Support wheels (displayed on picture B)

Mark ploughs (displayed on picture C)

In ground irrigation hose implanting set (displayed on picture D)

Picture A



Picture B



Picture C



Picture D



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **462** different serial versions of the Bed shaper machine

BED FORMING MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MULCH FOIL LAYING MACHINE

model ML



MODEL ML14VIS

purpose of the machine

- laying plastic, biodegradable or cellulosic foil on bare ground (previously properly prepared)
- laying plastic, biodegradable or cellulosic foil on previously made bed

machine properties

- adjustable spool holder which can hold foil max. width up to 1400 mm (1900 mm with ML19RW model)
- anti reel of mechanism implanted
- adjustable height of idler roller
- foil tension regulated by the degree of film pressing wheel angle
- drip hoses irrigation system implantation assumed parallel to the film laying operation (models with IS mark)

Working principle

1. Pressing roller compact soil (on models having this equipment)
2. Front ridger digs canal in which edges of foil is placed.
3. Film pressing wheel stretch, position and presses foil in previously digged canals.
4. Back ridger put the soil on edges of foil.

Machine versions:

1. ML14RW – machine that lays foil up to 1400 mm of length with rubber wheels
2. ML14V – machine that lays foil up to 1400 mm of length with metal roller
3. ML19RW – machine that lays foil up to 1900 mm of length with rubber wheels

MACHINE CATALOGUE



**AGROSERVIS
PROIZVODNJA**
d.o.o. • VIROVITICA

TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: MULCH FOIL LAYING MACHINE

Model	Max width of foil (cm)	Min demanded power (kW)	Machine weight (kg)	Working height regulation element
ML14RW	140	30 - 35	150	Wheel
ML14V	140	30 - 35	165	Roller
ML19RW	190	40 - 45	215	Wheel

ADDITIONAL EQUIPMENT

On ground irrigation hoses laying set (displayed on picture A)

Fertilize attachment (displayed on picture B)

Mark ploughs (displayed on picture C)

Punch wheels system (displayed on picture D is punch wheel system consisted of 2 wheels / 6 cups per wheel)

Picture A



Picture B



Picture C



Picture D



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 126 different serial versions of the Mulch foil laying machine.


FOIL LAYING MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

BED SHAPER - FOIL LAYING MACHINE

model BSML

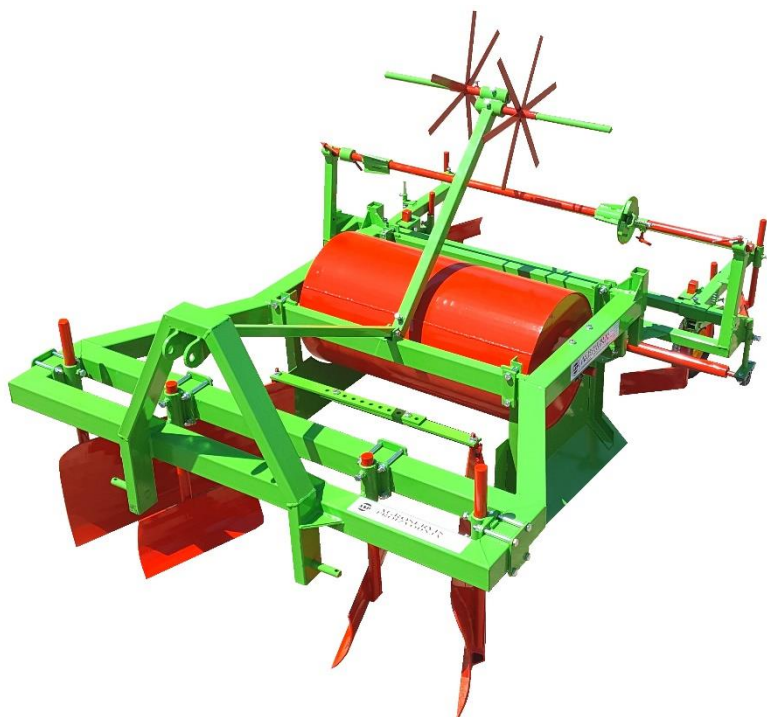

MODEL BSMLCR9040

purpose of the machine

- simultaneously forming bed and laying plastic, biodegradable or cellulosic foil

machine properties

- adjustable working width up to 900 mm (the version no. BSxR12015 has adjustable working width up to 1200 mm wide)
- adjustable working height up to 200 mm (the version no. BSxR9040 has adjustable working height up to 400 mm)
- built-in mechanism that prevents unrolling of the foil and unrolling of the hoses irrigation system
- Drip irrigation system implanting is predicted simultaneously with foil laying

Working principle

1. Front shares gather loose soil and forms the bed, lateral shares gathers soil and central shares fills the middle of bed.
2. Soil containment sides set up soil gathered by the front shares.
3. Pressing roller compact soil and forms top of the bed.
4. Front ridger digs canal in which edges of foil is placed.
5. Film pressing wheel stretch, position and presses foil in previously digged canals.
6. Back ridger put the soil on edges of foil.

Machine versions:

1. BSMLxR9020 – bed sharper machine standard*
2. BSMLxR9040 – bed sharper machine increased*
3. BSMLxR12020 – bed sharper machine broadened*

*In each version there is a possibility of choice between V shaped and cylindrical roller

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: BED SHAPER – FOIL LAYING MACHINE

Model	Max bed width (cm)	Max bed height (cm)	Min required power (kW)	Machine weight (kg)	Roller type	Max width of layed foil (mm)
BSMLxR9020	90	20	30-35	150	cylinder / V shaped	1400
BSMLxR9040	90	40	35-40	165	cylinder / V shaped	1400
BSMLxR9040A19	90	40	35-40	165	cylinder / V shaped	1900
BSMLCR12015	120	15	40 – 45	215	cylinder / V shaped	1900

ADDITIONAL EQUIPMENT

Fertilize attachment (displayed on picture A)

Support wheels (displayed on picture B)

Mark ploughs (displayed on picture C)

In ground irrigation hose implanting set (displayed on picture D)

On ground irrigation hoses laying set (displayed on picture E)

Punch wheels system (displayed on picture F is punch wheel system consisted of 2 wheels / 6 cups per wheel)

Picture A



Picture B



Picture C



Picture D



Picture E



Picture F



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **5005** different serial versions of the Bed shaper machine

BED FORMING - FOIL LAYING MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

DISC PLANTING MACHINE

model DPM



MODEL DPM2

purpose of the machine

- Semi -automatic transplanting of various sorts of vegetables: cabbage, tomato, paprika and others such as tobacco plants

machine properties

- Planting discs are made of special alloy steel
- Planting discs are resistant to permanent deformation
- Plant holder is metal designed that guarantee long-term use

Working principle

1. Planting discs are equipped with planting disc markers which allows even distance of planting in one row.
2. Workers on machine pick plants from trays and put them between planting discs .
3. After plants are inserted into a ground, plant presser wheel ensure plant transplantation by pressing soil around plant

Machine versions:

1. DPM 1 – transplanting machine with possibility of transplanting in 1 row
2. DPM 2 – transplanting machine with possibility of transplanting in 2 rows
3. DPM 3 – transplanting machine with possibility of transplanting in 3 rows
4. DPM 4 – transplanting machine with possibility of transplanting in 4 rows

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: DISC PLANTING MACHINE

Model	Type	Number of rows	Demanded power min (kW)	Planting distance between rows min (mm)	Transplanting speed (pcs/h)
DPM 1	carried	1	26	-	2700
DPM 2	carried	2	29	500	5400
DPM 3	carried	3	32	50	8100
DPM 4	carried	4	35	500	10800



MODEL DPM4

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 4 different serial versions of the Disc planting machine

DISC PLANTING MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

ON FOIL TRANSPLANTING MACHINE

model FTM



MODEL FTM 2

purpose of the machine

- Transplanting on bare, flat, ground or even on previously created bed

machine properties

- possibility to plant square soil blocks, modules, bulbs and seeds
- possibility of transplanting on already laid foil
- planting with the cups allows deep digging of young plants in the soil
- high work performance
- high degree of adaptability thanks to great number of possible adjustments:
 - adjusting the number of cups
 - adjusting the distance between plants in one row
 - adjusting distance between two rows
 - adjusting the depth of work
 - adjusting the moment when cups will open
 - adjusting the pressure of plant presser wheel

Working principle

1. The worker involved in transplantation climbs on the machine and fills the cups with plants
2. The cup descends plant to the ground.
3. The cup opens and puts plant in the soil.
4. After plants are inserted into a ground, plant presser wheel ensure plant transplantation by pressing soil around plant.

Machine versions:

1. FTM 1 – Transplanting machine with possibility of transplanting in 1 row
2. FTM 2 – Transplanting machine with possibility of transplanting in 2 rows
3. FTM 2 plus – Transplanting machine with possibility of transplanting in 2 rows with wider frame
4. FTM 3 – Transplanting machine with possibility of transplanting in 3 rows

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: ON FOIL TRANSPLANTING MACHINE

Model	Type	Cup size (mm)	No. of rows	Demanded power min.(kW)	Distance between rows (mm)	Distance in 1 row min.(mm)	Transplanting speed (pcs/h)	Tyre size
FTM 1	carried	60 x 60	1	29	-	240	2800-3000	5,00-12
FTM 2	carried	60 x 60	2	50	400 - 1300	240	5600-6000	5,00-12
FTM 2 plus	carried	60 x 60	2	50	400 - 1800	240	5600-6000	5,00-12
FTM 3	carried	60 x 60	3	50	400 - 900	240	8400-9000	5,00-12



MODEL FTM 1



Transplanting of bulb pepper

Transplanting of tobacco



MODEL FTM 2 plu

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 48 different serial versions of the On foil transplanting machine

ON FOIL TRANSPLANTING MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

POTATO PLANTING MACHINE

model PP



MODEL PP2

purpose of the machine

- Semi -automatic potato planting

machine properties

- Plant holder is metal designed - guarantee of long-term use
- Consistent planting depth
- Constantly equal distance of planting in one row

Working principle

1. Planting plough creates furrows where potato will be planted
2. Workers on machine lays potato from holder and put them between planting mechanism paddles .
3. Wheel propelled planting mechanism lowers the potato in ground
4. Planting discs covers and forms bed

Machine versions:

1. PP 1 – potato planting machine with possibility of planting in 1 row
2. PP 2 – potato planting machine with possibility of planting in 2 rows
3. PP 4 – potato planting machine with possibility of planting in 4 rows

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: POTATO PLANTING MACHINE

Model	Type	Number of rows	Demanded power min (kW)	Planting distance between rows min (mm)	Planting distance in 1 row min (mm)	Transplanting speed (pcs/h)
PP 1	carried	1	20	-	220 - 300	600 - 700
PP 2	carried	2	29	700 - 750	220 - 300	1200 - 1400
PP 4	carried	4	35	700 - 750	220 - 300	2400 - 2800



MODEL PP1



MODEL PP4

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 3 different serial versions of the Potato planting machine.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MULCH FOIL LIFTING MACHINE

model MFL



MODEL MFL 1 RWCD

purpose of the machine

- lifting of foil as well as drip irrigation system hoses

machine properties

- foil lifting depth control
- working width regulation according to foil that's being lifted
- simultaneously gathers foil as well as irrigation system hoses
- operating with machine require only one worker
- trusted functionality
- simplicity of handling
- high work performance

Working principle

1. Side cutting discs cuts soil releasing foil for easier removal.
2. Cutting disc cuts foil on 2 equal parts, facilitating foil removal (on models having this equipment)
3. Foil lift plough digs foil up and lifts foil from the ground.

Machine versions:

1. MFL 1 – Mulch foil lifter of 1 row of mulch foil

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: MULCH FOIL LIFTING MACHINE

Model	Type	Number of rows	Demanded power (HP)	Working width (mm)
MFL 1	carried	1	60 - 100	900 - 1500



← MFL machine in action

MODEL MFL 1CDRV



MODEL MFL 1 MW

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 4 different serial versions of the Mulch foil lifting machine.

MULCH FOIL LIFTING MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MULCH FOIL REMOVING MACHINE

model MFR



MODEL MFR 1

purpose of the machine

- lifting and gathering of foil as well as drip irrigation system hoses

machine properties

- foil wrapping and gathering speed regulated by manual hydraulic command control.
- hydraulic separation of cones
- simultaneously gathers foil as well as irrigation system hoses
- operating with machine require only two workers
- trusted functionality
- simplicity of handling
- high work performance

Working principle

1. Cutting discs cuts soil releasing foil for easier removal.
2. Foil lift plough digs foil up and lifts foil from the ground.
3. Foil is wrapped around cones powered by hydraulic motor.
4. Cones that are fully wrapped are easily emptied by separating two cones

Machine versions:

1. MFR 1 – Mulch foil remover of 1 row of mulch foil

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: MULCH FOIL REMOVING MACHINE

Model	Type	Number of rows	Demanded power (HP)	Working width (mm)
MFR 1	carried	1	70 - 120	< 1200



MODEL MFR 1

← MFR machine in action

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 1 different serial versions of the Mulch foil removing machine.

MULCH FOIL REMOVING MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

GARDEN SUBSOILER MACHINE

model GSS



MODEL GSS 1

purpose of the machine

- Deep tilling of soil in greenhouses

machine properties

- Working bodies are made from high quality steel.
- Adjustable distances between working parts
- Meliorate soil structure
- Increase soil capacity
- trusted functionality
- simplicity of handling
- high work performance

Working principle

1. Working width of machine is set up by setting up distances between working parts.
2. Working depth is regulated via back hydraulic of the tractor

Machine versions:

1. GSS 1 – Garden subsoiler with 1 working part
2. GSS 2 – Garden subsoiler with 2 working parts
3. GSS 3 – Garden subsoiler with 3 working parts

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: GARDEN SUBSOILER MACHINE

Model	Type	Number of working parts	Demanded power min (HP)	Working depth max (mm)
GSS 1	carried	1	30	500
GSS 2	carried	2	40	500
GSS 3	carried	3	50	500

GSS machine in action



MODEL GSS 3

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **3** different serial versions of the Garden subsoiler machine.

GARDEN SUBSOILER MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

ROOT VEGETABLE DIGGER MACHINE

model RVD



MODEL RVD 1

purpose of the machine

- Digging of root vegetables

machine properties

- Working body created from high quality steel
- operating with machine require only one worker
- trusted functionality
- simplicity of handling
- high work performance

Working principle

1. Working depth is regulated via metal wheel

Machine versions:

1. RVD 1 – Root vegetable digger machine working width 1,2 m

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR VEGETABLES

MACHINE: ROOT VEGETABLE DIGGER MACHINE

Model	Type	Demanded power (HP)	Working width (mm)
RVD 1	carried	60 - 100	1200



MODEL RVD 1

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 1 different serial versions of the Root vegetable digger machine.

ROOT VEGETABLE DIGGER MACHINES


*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.




**AGROSERVIS
PROIZVODNJA**
d.o.o. • VIROVITICA

MACHINE CATALOGUE

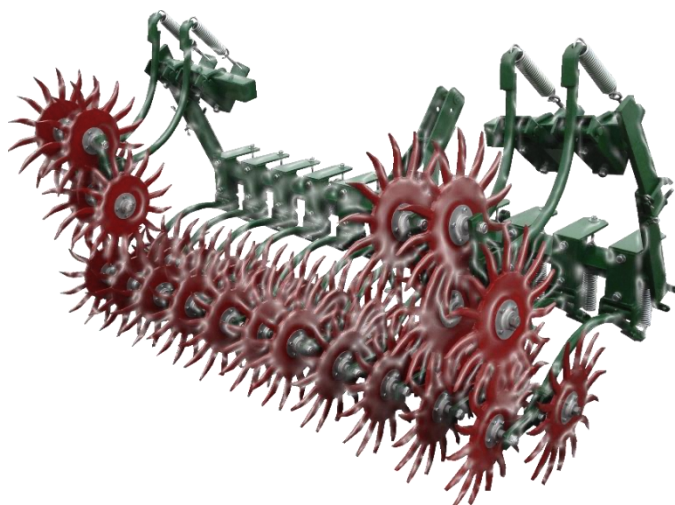

SOIL TREATMENT MACHINERY

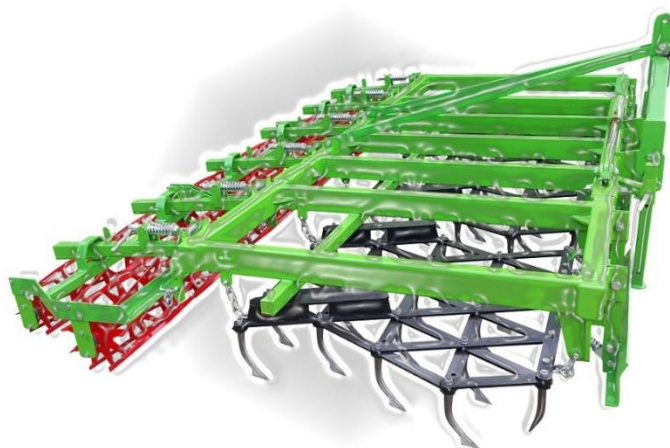

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



DISC HARROW MACHINE	29
CRUST BREAKING CULTIVATOR.....	33
SUBSOILERS.....	35
GRUBER COMPACT CULTIVATOR.....	37
SPRING TOOTH HARROW MACHINE.....	39
SPIKE HARROW	45

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: DISC HARROW MACHINES

DISC HARROW MACHINE

model xxCDH



MODEL HVCDH 3,2

purpose of the machine

- Surface tilling of soil

machine properties

- carried
- V version harrow
- Frame: Tube 100 x 100
- Discs of italian manufacturer
- trusted functionality
- simplicity of handling
- high work performance

Machine versions:

1. HVCDH – Heavy weight disc harrow – discs diameter 560 mm
2. MVCDH – Medium weight disc harrow – discs diameter 510 mm
3. LVCDH – Light weight disc harrow – discs diameter 460 mm

MACHINE CATALOGUE



TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: DISC HARROW MACHINES

HVCDH disc harrows

Model	Type	Working width (mm)	Number of working parts	Working part diameter (mm)	Distance between discs (mm)	Mass (kg)	Demanded power min (kW)
HVCDH 2,4	carried	2400	24	560/4,5	195	820	55
HVCDH 2,6	carried	2600	26	560/4,5	195	890	60
HVCDH 2,8	carried	2800	28	560/4,5	195	960	65
HVCDH 3,0	carried	3000	30	560/4,5	195	1030	70
HVCDH 3,2	carried	3200	32	560/4,5	195	1100	75

HVCDH machine in action



MODEL HVCDH 3,2

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 5 different serial versions of the Heavy weight disc harrow machine.

DISC HARROW MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: DISC HARROW MACHINES

MVCDH disc harrows

Model	Type	Working width (mm)	Number of working parts	Working part diameter (mm)	Distance between discs (mm)	Mass (kg)	Demanded power min (kW)
MVCDH 2,4	carried	2400	24	510/4	195	780	52
MVCDH 2,6	carried	2600	26	510/4	195	850	57
MVCDH 2,8	carried	2800	28	510/4	195	910	62
MVCDH 3,0	carried	3000	30	510/4	195	980	67
MVCDH 3,2	carried	3200	32	510/4	195	1050	72



MODEL MVCDH 3,2

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **5** different serial versions of the Medium weight disc harrow machine.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: DISC HARROW MACHINES

LVCDH disc harrows

Model	Type	Working width (mm)	Number of working parts	Working part diameter (mm)	Distance between discs (mm)	Mass (kg)	Demanded power min (kW)
LVCDH 2,4	carried	2400	24	460/3,25	180	580	46
LVCDH 2,6	carried	2600	26	460/3,25	180	630	50
LVCDH 2,8	carried	2800	28	460/3,25	180	680	54
LVCDH 3,0	carried	3000	30	460/3,25	180	730	58
LVCDH 3,2	carried	3200	32	460/3,25	180	780	63



MODEL LVCDH 3,2

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 5 different serial versions of the Light weight disc harrow machine.


DISC HARROW MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

CRUST BREAKING CULTIVATOR

model RH

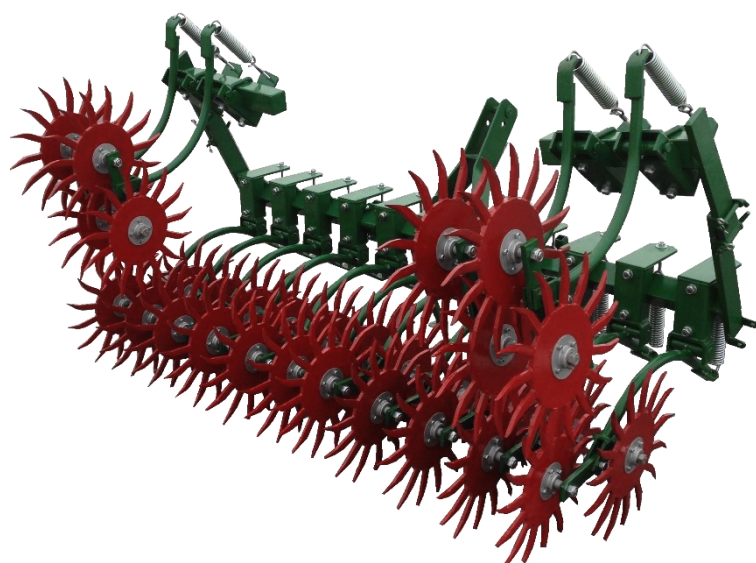

MODEL GSS 1

purpose of the machine

- Surface crust breaking
- Cultivation of plants

machine properties

- adjustable distance between working parts
- adjustable pressure working parts apply on the soil
- working parts – star wheels are made of high strength steel with high resistance to wear
- side sections lifting performed manually or hydraulic
- easy handling
- high work effect

Working principle

1. Rotating working parts – star wheels breaks surface crust and loosen the soil
2. Quality of machine performance depends on the driving speed – faster the speed is soil (crust) will be broken more intensely
3. Pressure working parts apply on the soil is regulated by levers on each working body carrier.

Machine versions:

1. RHM – Rotary hoe with manual side lifting
2. RHH – Rotary hoe with hydraulic side lifting

MACHINE CATALOGUE



TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: ROTARY HOE / CRUST BREAKING CULTIVATOR

Model	Type	Working width (mm)	Demanded power (min KS)	Working body	Working body No. (pcs)	Distance between working body (mm)
-------	------	-----------------------	----------------------------	--------------	---------------------------	---------------------------------------

MODELS WITH MANUALLY SIDE SECTION LIFTING

RHM 3,0	carried	3000	35	star wheels	30	105
RHM 4,5	carried	4500	55	star wheels	45	105
RHM 6,0	carried	6000	80	star wheels	60	105

MODELS WITH HYDRAULIC SIDE SECTION LIFTING

RHH 3,0	carried	3000	35	star wheels	30	105
RHH 4,5	carried	4500	55	star wheels	45	105
RHH 6,0	carried	6000	80	star wheels	60	105



MODEL RHM 3,0

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **6** different serial versions of the Rotary hoe/Crust breaking cultivator machine.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

SUBSOILERS

model SS



MODEL SSA 1

purpose of the machine

- Deep tilling of soil

machine properties

- Working bodies are made from high quality steel.
- Adjustable distances between working parts
- Possibility of mounting additional bowl on working bodies
- Meliorate soil structure
- Increase soil capacity
- trusted functionality
- simplicity of handling
- high work performance

Working principle

1. Working width of machine is set up by setting up distances between working parts.
2. Working depth is regulated via back hydraulic of the tractor

Machine versions:

1. SSF – Subsoiler with fixed working parts
2. SSA – Subsoiler with adaptable working parts

MACHINE CATALOGUE



TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: SUBSOILERS

Model	Type	Number of working parts	Demanded power min (HP)	Working depth max (mm)	Working width (mm)
MODEL WITH ADAPTABLE KNIVES					
SSA 1	carried	1	60	900	-
SSA 2	carried	2	70-100	900	300 - 700
SSA 2/3	carried	2	70 - 100	900	300 - 1700
SSA 3	carried	3	150	900	300 - 850
MODEL WITH FIXED KNIVES					
SSF 1	carried	1	60	900	-
SSF 2	carried	2	70-100	900	1000
SSF 2/3	carried	2	70 - 100	900	2000
SSF 3	carried	3	150	900	1000

SSA machine in action



MODEL SSA 2



MODEL SSA 3

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **16** different serial versions of the Subsoiler machine.

SUBSOILER MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: GRUBER COMPACT CULTIVATOR

GRUBER COMPACT CULTIVATOR

model GCC



MODEL GCC 2,5

purpose of the machine

- Mixing crop residues with soil

machine properties

- carried
- working depth 5 – 25 cm
- included roller for additional mixing efficiency
- discs of italian manufacturer
- trusted functionality
- simplicity of handling
- high work performance

Machine versions:

1. GCC 2,5 – Gruber compact cultivator working width of 2,5 m
2. GCC 3 – Gruber compact cultivator working width of 3 m
3. GCC 3,5 – Gruber compact cultivator working width of 3,5 m

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: GRUBER COMPACT CULTIVATOR

Model	Type	Working width (mm)	Working depth (mm)	No. of blades (pcs)	No. of discs (pcs)	Roller diameter (mm)	Demanded power min (kW)
GCC 2,5	carried	2500	50 - 250	5	6	500	60 - 90
GCC 3,0	carried	3000	50 - 250	6	7	500	70 - 100
GCC 3,5	carried	3500	50 - 250	7	8	500	80 - 110

GCC 2,5 machine in action



MODEL GCC 2,5

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **3** different serial versions of the Gruber compact cultivator machine.

GRUBER COMPACT CULTIVATOR MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

SPRING TOOTH HARROW MACHINE

model xxSTH



MODEL SPRSTH 3,0

purpose of the machine

- Loosening of soil before planting
- Breaking and crushing crusted layers of soil

machine properties

- carried
- working parts – S springs
- equipped with rollers
- trusted functionality
- simplicity of handling
- high work performance



MODEL DRSTH 3,0

Machine versions:

1. FSTH – Foldable spring tooth harrow
2. SRSTH – Single roller spring tooth harrow
3. DRSTH – Double roller spring tooth harrow
4. SPRSTH – Spike roller spring tooth harrow

MACHINE CATALOGUE



TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: SPRING TOOTH HARROW MACHINES

FCDH machine in action



MODEL FSTH 4,4



MODEL SRSTH 2,0

SPRING TOOTH HARROW MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: SPRING TOOTH HARROW MACHINES

FSTH spring tooth harrows

Model	Type	Working width (mm)	Working depth (mm)	No. of working parts (pcs)	No. of rollers (pcs)	Roller 1 diameter (mm)	Roller 1 diameter (mm)	Front (leveling) plough width (mm)	Required power min (HP)
FSTH 4,2	carried	4200	80 - 120	34	2	300	220	4200	100 - 120
FSTH 4,4	carried	4400	80 - 120	36	2	300	220	4400	105 - 125
FSTH 4,6	carried	4600	80 - 120	38	2	300	220	4600	110 - 130
FSTH 4,8	carried	4800	80 - 120	38	2	300	220	4800	120 - 140
FSTH 5,0	carried	5000	80 - 120	40	2	300	220	5000	135 - 155
FSTH 5,2	carried	5200	80 - 120	42	2	300	220	5200	140 - 160
FSTH 5,4	carried	5400	80 - 120	44	2	300	220	5400	145 - 165
FSTH 5,6	carried	5600	80 - 120	46	2	300	220	5600	150 - 170
FSTH 6,0	carried	6000	80 - 120	48	2	300	220	6000	160 - 190
FSTH 6,4	carried	6400	80 - 120	50	2	300	220	6400	170 - 210
FSTH 6,6	carried	6600	80 - 120	52	2	300	220	6600	180 - 220
FSTH 6,8	carried	6800	80 - 120	54	2	300	220	6800	190 - 230
FSTH 7,2	carried	7200	80 - 120	58	2	300	220	7200	230<



MODEL FSTH 4,4

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **13** different serial versions of the Foldable spring tooth harrow machine .

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE




TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: SPRING TOOTH HARROW MACHINES

SRSTH spring tooth harrows

Model	Type	Working width (mm)	Working depth (mm)	No. of working parts (pcs)	No. of rollers (pcs)	Roller diameter (mm)	Demanded power min (kW)
SRSTH 1,8	carried	1800	80 - 120	14	1	270	23
SRSTH 2,0	carried	2000	80 - 120	16	1	270	27
SRSTH 2,25	carried	2250	80 - 120	18	1	270	32
SRSTH 2,5	carried	2500	80 - 120	20	1	270	42
SRSTH 2,8	carried	2800	80 - 120	22	1	270	47
SRSTH 3,0	carried	3000	80 - 120	24	1	270	52

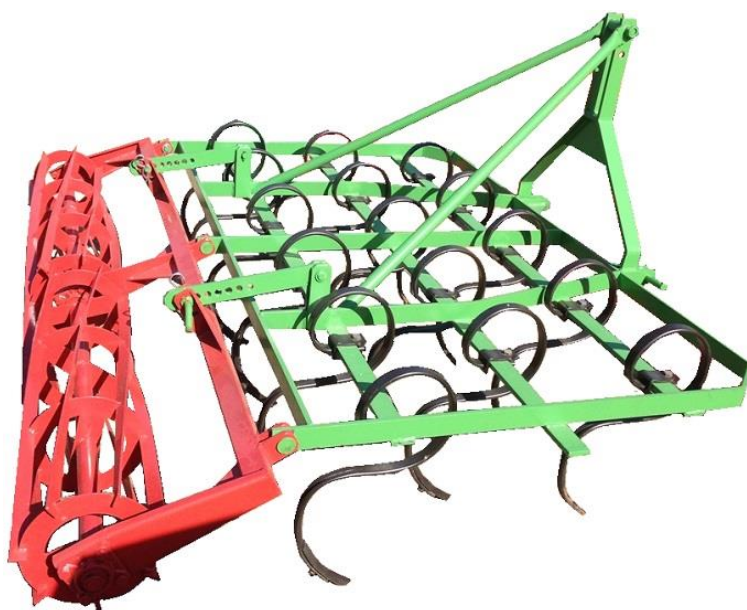

MODEL SRSTH 2,0

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **6** different serial versions of the Single roller spring tooth harrow machine.

SPRING TOOTH HARROW MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: SPRING TOOTH HARROW MACHINES

DRSTH spring tooth harrows

Model	Type	Working width (mm)	Working depth (mm)	No. of working parts (pcs)	No. of rollers (pcs)	Roller 1 diameter (mm)	Roller 1 diameter (mm)	Front (leveling) plough width (mm)	Required power min (kW)
DRSTH 1,8	carried	1800	80 - 120	14	2	270	200	1800	26
DRSTH 2,0	carried	2000	80 - 120	16	2	270	200	2000	30
DRSTH 2,25	carried	2250	80 - 120	18	2	270	200	2250	35
DRSTH 2,5	carried	2500	80 - 120	20	2	270	200	2500	45
DRSTH 2,8	carried	2800	80 - 120	22	2	270	200	2800	50
DRSTH 3,0	carried	3000	80 - 120	24	2	270	200	3000	55



MODEL DRSTH 2,0

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **6** different serial versions of the Double roller spring tooth harrow machine .

MACHINE CATALOGUE



TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: SPRING TOOTH HARROW MACHINES

SPRSTH spring tooth harrows

Model	Type	Working width (mm)	Working depth (mm)	No. of working parts (pcs)	No. of rollers (pcs)	Roller diameter (mm)	No. of star shaped rollers (pcs)	Star shaped roller diameter (mm)	Required power min (kW)
SPRSTH 1,8	carried	1800	80 - 120	14	1	300	2	300	26
SPRSTH 2,0	carried	2000	80 - 120	16	1	300	2	300	30
SPRSTH 2,25	carried	2250	80 - 120	18	1	300	2	300	36
SPRSTH 2,5	carried	2500	80 - 120	20	1	300	2	300	47
SPRSTH 2,8	carried	2800	80 - 120	22	1	300	2	300	52
SPRSTH 3,0	carried	3000	80 - 120	24	1	300	2	300	60



MODEL SPRSTH 2,8

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **6** different serial versions of the Spike roller spring tooth harrow machine .

SPRING TOOTH HARROW MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: SPIKE HARROW

SPIKE HARROW

model SH



MODEL SH 4,4

purpose of the machine

- Loosening of soil before planting
- Breaking and crushing crusted layers of soil

machine properties

- carried
- working parts – harrow spikes
- equipped with rollers
- trusted functionality
- simplicity of handling
- high work performance

Machine versions:

1. SH – spike harrow

MACHINE CATALOGUE



TYPE OF MACHINE SOIL TREATMENT MACHINERY

MACHINE: SPIKE HARROW

Model	Type	Working width (mm)	Mass (kg)	No. of rollers (pcs)	Roller 1 diameter (mm)	Roller 1 diameter (mm)	Front (leveling) plough width (mm)	Required power min (HP)
SH 4,2	carried	4200	1200	2	300	220	4200	100 - 120
SH 4,4	carried	4400	1250	2	300	220	4400	105 - 125
SH 4,6	carried	4600	1320	2	300	220	4600	110 - 130
SH 4,8	carried	4800	1370	2	300	220	4800	120 - 140
SH 5,0	carried	5000	1455	2	300	220	5000	135 - 155
SH 5,2	carried	5200	1490	2	300	220	5200	140 - 160
SH 5,4	carried	5400	1540	2	300	220	5400	145 - 165
SH 5,6	carried	5600	1580	2	300	220	5600	150 - 170
SH 6,0	carried	6000	1670	2	300	220	6000	160 - 190
SH 6,4	carried	6400	1830	2	300	220	6400	170 - 210
SH 6,6	carried	6600	1875	2	300	220	6600	180 - 220
SH 6,8	carried	6800	1950	2	300	220	6800	190 - 230
SH 7,2	carried	7200	2080	2	300	220	7200	230<



MODEL SH 4,4

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **13** different serial versions of the Spike harrow machine.


SPIKE HARROW MACHINES MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.



MACHINES FOR HERBS AND MACHINES FOR HERBS AND TOBACCO TOBACCO

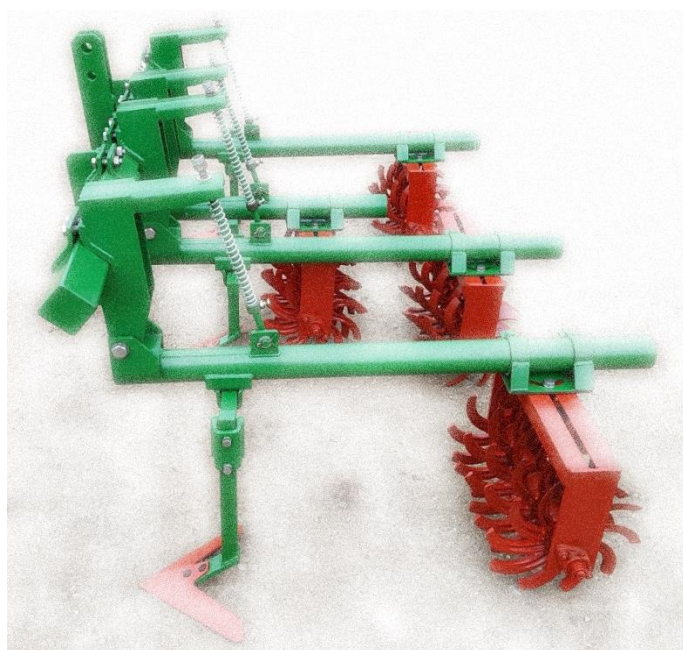

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



HEMP HARVESTING HEADER	49
SPIKE HARROW	51
ADAPTATION OF CHAMOMILE HARVESTER.....	53
TOBACCO BED SHAPER	55
ROTOCULTIVATOR WEEDER MACHINE.....	57

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

HEMP HARVESTING HEADER

model HHH



MODEL HHH 3,5

purpose of the machine

- facilitation and acceleration of hemp flower harvesting speed

machine properties

- quick and easy attachment on tractor
- avoids complications of harvesting hemp flower
- compact dimensions
- regulation of moving elements speed
- complete harvesting process is being hydromotor propelled

Working principle

1. Front cutter bar cuts top of the plant
2. Side loading conveyor belt transports harvested hemp into collecting vehicle

Machine versions:

1. HHH 3,5 – Harvesting header working width 3,5 m

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR HERBS AND TOBACCO

MACHINE: HEMP HARVESTING HEADER

Model	propulsion	Working speed (km/h)	Cutting width (mm)	Harvesting height (mm)
HHH 3,5	hydromotors	2 - 6	3500	1000<

HHH machine in action



MODEL HHH 3,5

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 1 different serial versions of the Hemp harvesting header machine.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

CHAMOMILE SEEDER

model CS



MODEL CS 3,0

purpose of the machine

- sowing chamomile seeds

machine properties

- quick and easy attachment on tractor
- easy filling of the container
- roller driven
- regulation of seed quantity
- chargeable roller

Working principle

1. Fill the container of the machine
2. Lower the machine on the ground
3. Machine (sowing) is propelled by roller rotation

Machine versions:

1. CS 3,0 – Chamomile harvester working width 3,0 m

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR HERBS AND TOBACCO

MACHINE: CHAMOMILE SEEDER

Model	Working width (mm)	Demanded power min. (HP)	Capacity (m ³)	Back roller diameter (mm)
CS 3,0	3000	2 - 6	0,57	480

CS machine in action



MODEL CS 3,0

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 1 different serial versions of the Chamomile seeder machine.

CHAMOMILE SEEDER MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

ADAPTATION OF CHAMOMILE HARVESTER

model CHC



MODEL CHC

purpose of the machine

- facilitation and acceleration of chamomile harvesting speed

machine properties

- adaptation of Deuth Fahr machine
- self-propelled
- quick and easy emptying of bunker
- avoids complications of harvesting hemp flower
- regulation of moving elements speed

Working principle

1. Header picks chamomile flower
2. Transport belt transfers flower into machines bunker

Machine versions:

1. CHC – Adaptation of wheat harvester into harvester for chamomile

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR HERBS AND TOBACCO

MACHINE: CHAMOMILE HARVESTER

Model	Working speed (km/h)	Cutting width (mm)	Harvesting capacity (ha/h)	Bunker volume (m ³)
CHC	3,6	3600	0,7 - 1	7

CHC machine in action



MODEL CHC

CHAMOMILE HARVESTER ADAPTATION

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **1** different versions of the Camomile harvester adaptation.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TOBACCO BED SHAPER

model TBS



MODEL TBS 2SS

purpose of the machine

- shaping of bed for tobacco planting

machine properties

- quick and easy attachment on tractor
- working bodies - discs
- trusted functionality
- simplicity of handling
- high work performance

Working principle

1. Front subsoiler knives loosen and lifts condensed soil (on models equipped with this attachment)
2. Discs of the machine gathers soil forming the bed.

Machine versions:

1. TBS 2 – 2 rows shaping machine
2. TBS 4 – 4 rows shaping machine

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR HERBS AND TOBACCO

MACHINE: TOBACCO BED SHAPER

Model	No. of rows	Demanded power min. (kW)	Bed height (mm)	Distance between rows (mm)
TBS 2	2	75	350	800 - 1250
TBS 4	4	100	650	800 - 1250

ADDITIONAL EQUIPMENT

Subsoiling knives (displayed on picture A)

Fertilize attachment (displayed on picture B)

Picture A



Picture B



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **8** different serial versions of the Tobacco bed shaper machine.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

ROTOCULTIVATOR WEEDER MACHINE

model RC



MODEL RC 2

purpose of the machine

- primarily cultivation of tobacco

machine properties

- necessary if tobacco is grown on raised bed
- quick and easy attachment on tractor
- working parts – stars
- adjustable position of working parts:
 - towards bed
 - parallel to the bed
- according to the position of stars machine can:
 - add soil to the bed
 - remove soil from the bed
- on flat surfaces machine can operate as standard cultivator
- trusted functionality
- simplicity of handling
- high work performance

Working principle

1. Front (V-shaped) shares digs soil
2. Stars distribute / cultivate soil

Machine versions:

1. RC 2 – 2 rows cultivator machine
2. RC 4 – 4 rows cultivator machine

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR HERBS AND TOBACCO

MACHINE: ROTOCULTIVATOR

Model	No. of rows	Demanded power min. (kW)	Rec. working speed (km/h)	Distance between rows (mm)
RC 2	2	30	6 - 8	800 - 1250
RC 4	4	60	6 - 8	800 - 1250

ADDITIONAL EQUIPMENT

Fertilize attachment (displayed on picture A)

Picture A



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **4** different serial versions of the Rotocultivator machine.


*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.



**AGROSERVIS
PROIZVODNJA**
d.o.o. • VIROVITICA

MACHINE CATALOGUE

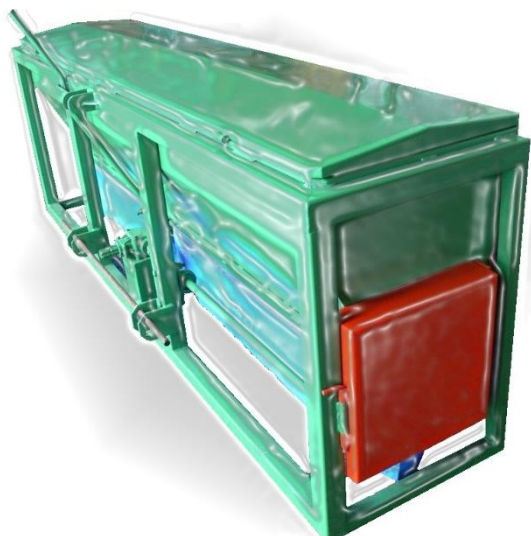

MACHINES FOR FERTILIZATION AND PROTECTION



*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



LIME SPREADING MACHINE.....	61
ROW CROP CULTIVATOR.....	63
SPRING TOOTH ROW CROP CULTIVATOR	65
PUMPKIN CULTIVATOR	67
FERTILIZER SPREADER	69

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

LIME SPREADING MACHINE

model LSC



MODEL LSC 2,5

purpose of the machine

- spreading lime on acid soil to increase pH level of the soil

machine properties

- Possibility of spreading powder formed or granulated lime
- robust construction
- constructed for long term use
- easy and simple handling
- high work effect

Working principle

1. Fill up the container.
2. Protection grid of machine prevents clogging of spreading mechanism.
3. Control spreading of lime by lever

Machine versions:

1. LSC 2,5 – Lime spreader working width 2,5 m

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR FERTILIZATION AND PROTECTION

MACHINE: LIME SPREADER

Model	Type	Working width (mm)	Demanded power (min kW)	Capacity (max kg)	Propulsion	Spreading possibility
LSC 2,5	carried	2500	40	500	Cardan shaft	Powder or granulate

LSC machine in action



MODEL LSC 2,5

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 1 different serial versions of the Lime spreading machine.

LIME SPREADING MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

ROW CROP CULTIVATOR

model RCC



MODEL RCC 4

purpose of the machine

- Breaking the crust
- Weeding all kinds of row crops such as corn, sunflower etc

machine properties

- parallelogram system allows a constant adjustment to the terrain while remaining parallel to the surface
- adjustable inter-row spacing and working depth
- robust construction
- constructed for long term use
- easy and simple handling
- high work effect

Working principle

1. In fertilize attachment container pour the chemical fertiliser (on models having this equipment), which will be layed during cultivation
2. Shares cultivates soil between row crops
3. Quality of machine performance depends on the driving speed

Machine versions:

1. RCC 2 – Row crop cultivator for 2 rows of cultivation
2. RCC 4 – Row crop cultivator for 4 rows of cultivation

MACHINE CATALOGUE



TYPE OF MACHINE

MACHINES FOR FERTILIZATION AND PROTECTION

MACHINE: ROW CROP CULTIVATOR

Model	Type of machine	No of rows (pcs)	No of sections (pcs)	Working width (mm)	Demanded power (kW)	Working speed (km/h)
RCC 2	carried	2	3	2000	18 - 26	< 8
RCC 4	carried	4	5	3600	26 - 40	< 8

ADDITIONAL EQUIPMENT

Fertilize attachment (displayed on picture A)

Picture A



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **4** different serial versions of the Row crop cultivator machine.

ROW CROP CULTIVATOR MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

SPRING TOOTH ROW CROP CULTIVATOR

model STRCC



MODEL STRCC 2

purpose of the machine

- Breaking the crust
- Weeding all kinds of row crops such as corn, sunflower etc

machine properties

- Weeding shares are positioned on S springs
- adjustable inter-row spacing and working depth
- robust construction
- constructed for long term use
- easy and simple handling
- high work effect

Working principle

1. In fertilize attachment container pour the chemical fertiliser (on models having this equipment), which will be layed during cultivation
2. Shares cultivates soil between row crops
3. Quality of machine performance depends on the driving speed

Machine versions:

1. STRCC 2 – Cultivator with S springs for 2 rows of cultivation
2. STRCC 4 – Cultivator with S springs for 4 rows of cultivation

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR FERTILIZATION AND PROTECTION MACHINE: SPRING TOOTH ROW CROP CULTIVATOR

Model	Type of machine	No of rows (pcs)	No of sections (pcs)	Working width (mm)	Demanded power (kW)	Working speed (km/h)
STRCC 2	carried	2	3	2000	18 - 26	< 8
STRCC 4	carried	4	5	3600	26 - 40	< 8

ADDITIONAL EQUIPMENT

Fertilize attachment (displayed on picture A)

Picture A



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 4 different serial versions of the Spring tooth row crop cultivator machine.

SPRING TOOTH ROW CROP CULTIVATOR MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

PUMPKIN CULTIVATOR

model PC



purpose of the machine

- Breaking the crust
- Weeding of row pumpkins

machine properties

- Weeding shares are positioned on S springs
- adjustable inter-row spacing and working depth
- robust construction
- constructed for long term use
- easy and simple handling
- high work effect

MODEL PC 1

Working principle

1. In fertilize attachment container pour the chemical fertiliser (on models having this equipment), which will be layed during cultivation
2. Shares cultivates soil between row crops
3. Quality of machine performance depends on the driving speed

Machine versions:

1. PC 1 – Pumpkin cultivator for 1 rows of cultivation
2. PC 2 – Pumpkin cultivator for 2 rows of cultivation

MACHINE CATALOGUE



TYPE OF MACHINE MACHINES FOR FERTILIZATION AND PROTECTION

MACHINE: PUMPKIN CULTIVATOR

Model	Type of machine	No of rows (pcs)	No of sections (pcs)	Working width (mm)	Demanded power (kW)	Working speed (km/h)
PC 1	carried	1	2	1660	18 - 26	< 8
PC 2	carried	2	3	3200	26 - 40	< 8

ADDITIONAL EQUIPMENT

Fertilize attachment (displayed on picture A)

Picture A



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **4** different serial versions of the Pumpkin cultivator machine.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

FERTILIZER SPREADER

model FS



purpose of the machine

- Fertilizer spreading

machine properties

- Spreading range 12 – 24 m
- Adjustable:
 - spreading quantity
 - spreading width
 - spreading direction
- Easy filling of the container
- Equipped with protective grid
- Easy and simple handling
- High work effect

MODEL FS 800

Working principle

1. Pour the fertiliser in container
2. Set up machine according to the demanded spreading level

Machine versions:

1. FS 800 – Fertilizer spreader capacity up to 800 l
2. FS 1000 – Fertilizer spreader capacity up to 1000 l
3. FS 1200 – Fertilizer spreader capacity up to 1200 l
4. FS 1500 – Fertilizer spreader capacity up to 1500 l

MACHINE CATALOGUE



**AGROSERVIS
PROIZVODNJA**
d.o.o. • VIROVITICA

TYPE OF MACHINE MACHINES FOR FERTILIZATION AND PROTECTION

MACHINE: FERTILIZER SPREADER

Model	Type of machine	Capacity (l)	Demanded power (HP)	Spraying width (m)	Spraying adjustment
FS 800	carried	800	110 - 130	12 - 24	hydraulic
FS 1000	carried	1000	110 - 130	12 - 24	hydraulic
FS 1200	carried	1200	110 - 130	12 - 24	hydraulic
FS 1500	carried	1500	110 - 130	12 - 24	hydraulic





MODEL FS 800

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 4 different serial versions of the Fertilizer spreader machine.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

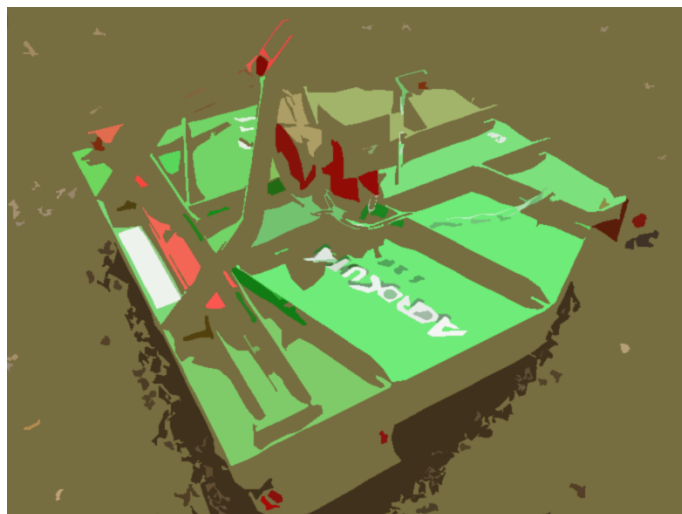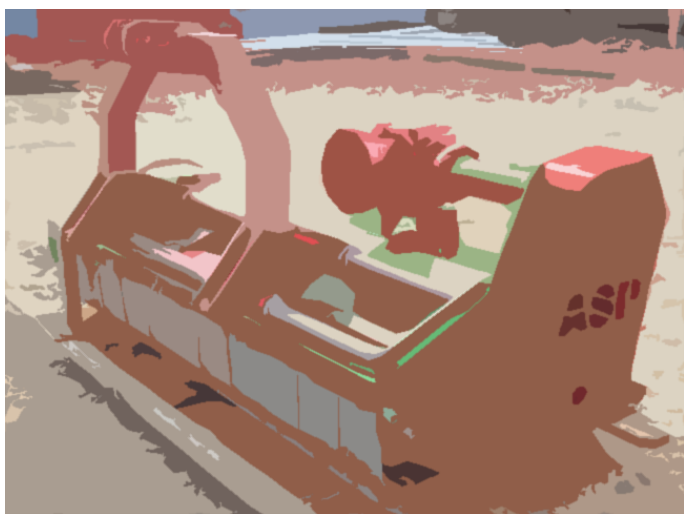

OTHER AGRICULTURAL MACHINES



*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



MULCHER SHREDDER / FLAIL MOWER	Pogreška! Knjižna oznaka nije definirana.
ROTARY MULCHER / ROTARY MOWER.....	Pogreška! Knjižna oznaka nije definirana.
CARDAN SHAFT CIRCULAR WOOD SAW	Pogreška! Knjižna oznaka nije definirana.
TRACTOR SNOW PLOUGH.....	Pogreška! Knjižna oznaka nije definirana.
TRACTOR GRADER.....	Pogreška! Knjižna oznaka nije definirana.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MULCHER SHREDDER / FLAIL MOWER

model MULxSx



MODEL MULMSH 1,6

purpose of the machine

- Cutting grass and crop residues
- Mulching branches

machine properties

- Rigid construction
- Designed for intensive usage
- Cuts material up to 5 cm in diameter
- Adjustable working height
- Can operate in floating position
- HARDOX side skids

Working principle

1. Machine moves on bottom skids
2. Working height regulated by back roller
3. Hammers / blades (depending on equipment level) cuts /mulchs grass, crop residues and branches

Machine versions:

1. MULMSH - Mulcher shredder with hammers and mechanical side-shift
2. MULHSH - Mulcher shredder with hammers and hydraulic side-shift
3. MULMSB - Mulcher shredder with blades and mechanical side-shift
4. MULHSB - Mulcher shredder with blades and hydraulic side-shift

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF MACHINE OTHER AGRICULTURAL MACHINES

MACHINE: MULCHER SHREDDER / FLAIL MOWER

Model	Type	Working width (mm)	Demanded power min.(kW)	Working parts	No of hammers (if equipped) (pcs)	No of blades (if equipped) (pcs)	Side shifting
MULxSx 1,0	carried	1000	22	hammer / blade	12	-	-
MULxSx 1,2	carried	1200	25	hammer / blade	14	28	mechanical/hydraulic
MULxSx 1,4	carried	1400	28	hammer / blade	18	36	mechanical/hydraulic
MULxSx 1,6	carried	1600	36	hammer / blade	20	40	mechanical/hydraulic
MULxSx 1,8	carried	1800	40	hammer / blade	22	44	mechanical/hydraulic
MULxSx 2,0	carried	2000	47	hammer / blade	26	52	mechanical/hydraulic
MULxSx 2,2	carried	2200	50	hammer / blade	28	56	mechanical/hydraulic
MULxSx 2,5	carried	2500	54	hammer / blade	30	60	mechanical/hydraulic

MULMSH 1,6 machine in action cutting crop residues



MULMSH 1,6 machine in action cutting grass residues



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **30** different versions of the Mulcher shredder / flail mower machines.

MULCHER SHREDDER / FLAIL MOWER MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

ROTARY MULCHER / ROTARY MOWER

model RMx



MODEL HRM 1,3

purpose of the machine

- Cutting grass and crop residues
- Mulching branches

machine properties

- Rigid construction
- Designed for intensive usage
- Cuts material up to 3 cm in diameter
- Adjustable working height
- Can operate in floating position
- HARDOX side skids

Working principle

1. Machine moves on bottom skids
2. Working height regulated by back roller
3. Blades cuts /mulchs grass, crop residues and branches

Machine versions:

1. RMM – Rotary mulcher shredder with mechanical side-shift
2. RMH – Rotary mulcher shredder with hydraulic side-shift
3. HRMM – Heavy rotary mulcher shredder with mechanical side-shift
4. HRMH – Heavy rotary mulcher shredder with hydraulic side-shift

MACHINE CATALOGUE



TYPE OF MACHINE OTHER AGRICULTURAL MACHINES

MACHINE: ROTARY MULCHER / ROTARY MOWER

Model	Type	Working width (mm)	Demanded power min.(kW)	Working parts	No of blades (pcs)	Mass (kg)	Side shifting
RM 0,9	carried	900	12	blades	2 -4	135	-
RM 1,1	carried	1100	14	blades	2 -4	165	mechanical/hydraulic
RM 1,3	carried	1300	16	blades	2 -4	190	mechanical/hydraulic
RM 1,5	carried	1500	20	blades	2 -4	230	mechanical/hydraulic
RM 1,7	carried	1700	25	blades	2 -4	265	mechanical/hydraulic

Model	Type	Working width (mm)	Demanded power min.(kW)	Working parts	No of blades (pcs)	Mass (kg)	Side shifting
HRM 1,3	carried	900	25	blades	2 -4	220	mechanical/hydraulic
HRM 1,5	carried	1100	30	blades	2 -4	250	mechanical/hydraulic
HRM 1,7	carried	1300	35	blades	2 -4	285	mechanical/hydraulic



MODEL HRM 1,3



ROTARY MULCHER / ROTARY MOWER MACHINES

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer **15** different versions of the Mulcher shredder / flail mower machines.

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

CARDAN SHAFT CIRCULAR WOOD SAW

model CCS



MODEL CCS 500

purpose of the machine

- Sawing wood

machine properties

- Cardan shaft propelled
- Designed for intensive usage
- Multiple protection devices installed:
 - Upper saw shield
 - Lower saw shield
 - Belt shield
 - Pressure handle
- Handhold to push table towards the saw
- Carried version
- Easy to handle

Working principle

1. Place the wood on table
2. Press the wood with pressure handle
3. Push the table towards the saw
4. When the wood is sawed release pressure handles

Machine versions:

1. CCS 500 – Circular with saw of 500 mm in diameter
2. CCS 600 – Circular with saw of 600 mm in diameter

MACHINE CATALOGUE



TYPE OF MACHINE OTHER AGRICULTURAL MACHINES

MACHINE: CARDAN SHAFT CIRCULAR WOOD SAW

Model	Type	Saw diameter (mm)	Demanded power min.(kW)	Torque transmission
CCS 500	carried	500	35	cardan
CCS 600	carried	600	35	cardan

CCS 600 machine in action



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 2 different versions of the Circular wood saw machines.

CARDAN SHAFT CIRCULAR WOOD SAW MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TRACTOR SNOW PLOUGH

model TSP



MODEL TSP 1,8

purpose of the machine

- Removing snow

machine properties

- Universal 3 point hitch
- Connecting on back tractor
- hydraulic
- 5 different positions
- Mechanical rotation

Working principle

1. Connect the machine on back tractor hydraulic
2. Set up plough angle

Machine versions:

1. TSP 1,2 – Tractor snow plough working width of 1,2 m
2. TSP 1,4 – Tractor snow plough working width of 1,4 m
3. TSP 1,6 – Tractor snow plough working width of 1,6 m
4. TSP 1,8 – Tractor snow plough working width of 1,8 m
5. TSP 2,0 – Tractor snow plough working width of 2,0 m

MACHINE CATALOGUE



TYPE OF MACHINE OTHER AGRICULTURAL MACHINES

MACHINE: TRACTOR SNOW PLOUGH

Model	Type	Working width (mm)	Height (mm)	Weight (kg)	Rotation	Rotation possibility
TSP 1,2	carried	1200	400	100	mechanical	5 positions every 17 degrees
TSP 1,4	carried	1400	400	110	mechanical	5 positions every 17 degrees
TSP 1,6	carried	1600	400	120	mechanical	5 positions every 17 degrees
TSP 1,8	carried	1800	500	190	mechanical	5 positions every 17 degrees
TSP 2,0	carried	2000	500	200	mechanical	5 positions every 17 degrees



MODEL TSP 1,8

Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 5 different versions of the Tractor snow plough machines.

TRACTOR SNOW PLOUGH MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TRACTOR GRADER

model TGC



MODEL TGC 2,0

purpose of the machine

- Grading and leveling soil
- Cleaning surfaces

machine properties

- Universal 3 point hitch
- Connecting on back tractor hydraulic
- 5 different positions
- Mechanical rotation

Working principle

1. Connect the machine on back tractor hydraulic
2. Set up plough angle

Machine versions:

1. TGC 1,8 – Tractor grader carried working width of 1,8 m
2. TGC 2,0 – Tractor grader carried working width of 2,0 m
3. TGC 2,2 – Tractor grader carried working width of 2,2 m
4. TGC 2,5 – Tractor grader carried working width of 2,5 m
5. TGC 3,0 – Tractor grader carried working width of 3,0 m

MACHINE CATALOGUE



TYPE OF MACHINE OTHER AGRICULTURAL MACHINES

MACHINE: TRACTOR GRADER

Model	Type	Working width (mm)	Height (mm)	Weight (kg)	Rotation	Rotation possibility
TGC 1,8	carried	1800	500	280	mechanical	5 positions every 17 degrees
TGC 2,0	carried	2000	500	290	mechanical	5 positions every 17 degrees
TGC 2,2	carried	2200	500	300	mechanical	5 positions every 17 degrees
TGC 2,5	carried	2000	500	320	mechanical	5 positions every 17 degrees
TGC 3,0	carried	3000	500	425	mechanical	5 positions every 17 degrees



Agroservis - proizvodnja d.o.o. to its valued customers currently can offer 5 different versions of the Tractor snow plough machines.


TRACTOR GRADER CARRIED MACHINES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.



GREENHOUSE CONSTRUCTIONS

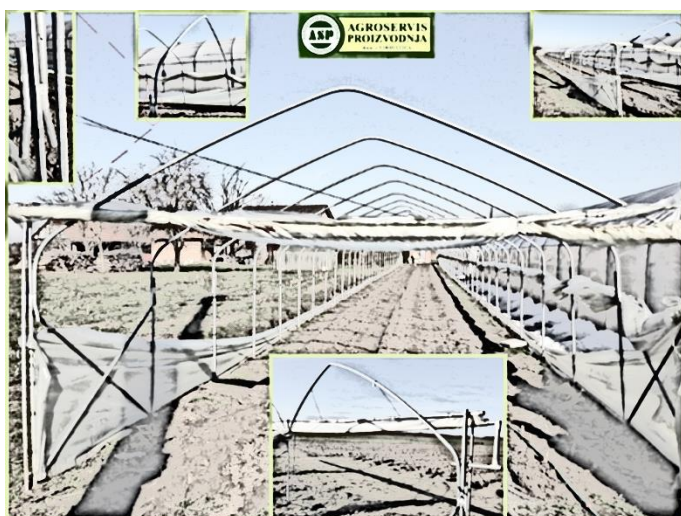

MACHINE CATALOGUE



GREENHOUSE CONSTRUCTION OF 8 m OF WIDTH.....	85
GREENHOUSE CONSTRUCTION OF 6 m OF WIDTH.....	87
GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH - elevated.....	89
GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH.....	91
LIGHT GREENHOUSE CONSTRUCTION FOR STRAWBERRIES.....	93
LIGHT GREENHOUSE CONSTRUCTION – ELEVATED - FOR RASPBERRIES.....	95
GREENHOUSE CONSTRUCTION OF 3 m OF WIDTH.....	97
GREENHOUSE CONSTRUCTION OF 2,5 m OF WIDTH.....	99

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF PRODUCT PROFESSIONAL GREENHOUSES GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 8 m

GREENHOUSE CONSTRUCTION OF 8 m OF WIDTH

model P8



GREENHOUSE CONSTRUCTION OF 8 m OF WIDTH

TECHNICAL DATA	
Width (m)	8
Length (m)	as buyer request
Distance between 2 columns (m)	2
Top height (m)	3,8
Entrance height (m)	2,6
Material basic construction is made of (galvanized tubes)	Ø 60 mm
Material connecting elements are made of (galvanized tubes)	Ø 32 mm

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF PRODUCT PROFESSIONAL GREENHOUSES GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 8 m

ADDITIONAL EQUIPMENT:

Aeration window (Picture A)

Aeration window pulley opening system

Roll door opening system (Picture B)

Classic door opening system (Picture F)

Clips for foil (Picture C)

Connective clamps (Picture D)

Side aeration system (Picture E)

Picture A



Picture C



Picture B



Picture D



Picture E



Picture F



GREENHOUSE CONSTRUCTION OF 8 m OF WIDTH

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF PRODUCT PROFESSIONAL GREENHOUSES GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 6 m

GREENHOUSE CONSTRUCTION OF 6 m OF WIDTH

model P6



GREENHOUSE CONSTRUCTION OF 6 m OF WIDTH

TECHNICAL DATA	
Width (m)	6
Length (m)	as buyer request
Distance between 2 columns (m)	2
Top height (m)	3,5
Entrance height (m)	2,1
Material basic construction is made of (galvanized tubes)	Ø 48 mm
Material connecting elements are made of (galvanized tubes)	Ø 28 mm

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF PRODUCT PROFESSIONAL GREENHOUSES GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 6 m

ADDITIONAL EQUIPMENT:

Aeration window (Picture A)

Aeration window pulley opening system

Roll door opening system (Picture B)

Clips for foil (Picture C)

Connective clamps (Picture D)

Side aeration system (Picture E)

Picture A



Picture C



Picture B



Picture D



Picture E



GREENHOUSE CONSTRUCTION OF 6 m OF WIDTH

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF PRODUCT PROFESSIONAL GREENHOUSES GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 4,65 m elevated

GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH - elevated

model P4,65p



GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH ELEVATED

TECHNICAL DATA	
Width (m)	4,65
Length (m)	as buyer request
Distance between 2 columns (m)	1,9
Top height (m)	2,9
Side height (m)	1,5
Material basic construction is made of (galvanized tubes)	Ø 32 mm
Material connecting elements are made of (galvanized tubes)	Ø 22 mm

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF PRODUCT PROFESSIONAL GREENHOUSES

GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 4,65 m elevated

ADDITIONAL EQUIPMENT:

Classic door opening system (Picture A)

Roll door opening system (Picture B)

Clips for foil (Picture C)

Connective clamps (Picture D)

Side aeration system (Picture E)

Picture A



Picture B



Picture C



Picture D



Picture E



GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH ELEVATED

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF PRODUCT

PROFESSIONAL GREENHOUSES

GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 4,65 m

GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH

model P4,65



GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH

TECHNICAL DATA	
Width (m)	4,65
Length (m)	as buyer request
Distance between 2 columns (m)	1,9
Top height (m)	2,5
Side height (m)	1,1
Material basic construction is made of (galvanized tubes)	Ø 32 mm
Material connecting elements are made of (galvanized tubes)	Ø 22 mm

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF PRODUCT PROFESSIONAL GREENHOUSES

GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 4,65 m

ADDITIONAL EQUIPMENT:

Classic door opening system (Picture A)

Roll door opening system (Picture B)

Clips for foil (Picture C)

Connective clamps (Picture D)

Picture A



Picture C



Picture B



Picture D



GREENHOUSE CONSTRUCTION OF 4,65 m OF WIDTH

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF PRODUCT

PROFESSIONAL GREENHOUSES

GREENHOUSE TYPE:

LIGHT GREENHOUSE CONSTRUCTION FOR
STRAWBERRIES

LIGHT GREENHOUSE CONSTRUCTION FOR STRAWBERRIES

model PVER



LIGHT GREENHOUSE CONSTRUCTION FOR STRAWBERRIES

TECHNICAL DATA	
Width (m)	4,8
Length (m)	as buyer request
Distance between 2 columns (m)	2
Top height (m)	3
Side height (m)	1,5
Material construction is made of (galvanized tubes)	Ø 32 mm

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF PRODUCT PROFESSIONAL GREENHOUSES

GREENHOUSE TYPE: LIGHT GREENHOUSE CONSTRUCTION FOR STRAWBERRIES

ADDITIONAL EQUIPMENT:

Roll door opening system (Picture A)

Clips for foil (Picture B)

Side aeration system – (via bushings) (Picture C)

Connective clamps (Picture D)

Picture A



Picture B



Picture B



Picture D



LIGHT GREENHOUSE CONSTRUCTION FOR STRAWBERRIES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF PRODUCT

PROFESSIONAL GREENHOUSES

GREENHOUSE TYPE:

LIGHT GREENHOUSE CONSTRUCTION –
ELEVATED - FOR RASPBERRIES

LIGHT GREENHOUSE CONSTRUCTION – ELEVATED - FOR RASPBERRIES

model PVERp



LIGHT GREENHOUSE CONSTRUCTION -E ELEVATED - FOR RASPBERRIES

TECHNICAL DATA	
Width (m)	4,8
Length (m)	as buyer request
Distance between 2 columns (m)	2
Top height (m)	3,5
Side height (m)	2
Material construction is made of (galvanized tubes)	Ø 32 mm

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF PRODUCT PROFESSIONAL GREENHOUSES

GREENHOUSE TYPE: LIGHT GREENHOUSE CONSTRUCTION –
ELEVATED - FOR RASPBERRIES

ADDITIONAL EQUIPMENT:

Roll door opening system (Picture A)

Clips for foil (Picture B)

Side aeration system – (via bushings) (Picture C)

Connective clamps (Picture D)

Picture A



Picture B



Picture B



Picture D



LIGHT GREENHOUSE CONSTRUCTION - E ELEVATED - FOR RASPBERRIES

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF PRODUCT HOBBY GREENHOUSES

GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 3 m

GREENHOUSE CONSTRUCTION OF 3 m OF WIDTH

model P3



GREENHOUSE CONSTRUCTION OF 3m OF WIDTH

TECHNICAL DATA	
Width (m)	3
Length (m)	as buyer request
Distance between 2 columns (m)	1,9
Top height (m)	2,5
Side height (m)	1,1
Material basic construction is made of (galvanized tubes)	Ø 32 mm
Material connecting elements are made of (galvanized tubes)	Ø 22 mm

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF PRODUCT

HOBBY GREENHOUSES

GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 3 m

ADDITIONAL EQUIPMENT:

Roll door opening system (Picture A)

Clips for foil (Picture B)

Side aeration system (Picture C)

Connective clamps (Picture D)

Picture A



Picture B



Picture C



Picture D



GREENHOUSE CONSTRUCTION OF 3 m OF WIDTH

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

TYPE OF PRODUCT HOBBY GREENHOUSES

GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 2,5 m

GREENHOUSE CONSTRUCTION OF 2,5 m OF WIDTH

model P2,5



GREENHOUSE CONSTRUCTION OF 2,5 m OF WIDTH

TECHNICAL DATA	
Width (m)	2,5
Length (m)	as buyer request
Distance between 2 columns (m)	1,5
Top height (m)	2
Side height (m)	1,6
Material basic construction is made of (galvanized tubes)	Ø 28 mm
Material connecting elements are made of (galvanized tubes)	Ø 22 mm

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.

MACHINE CATALOGUE



TYPE OF PRODUCT

HOBBY GREENHOUSES

GREENHOUSE TYPE: GREENHOUSE CONSTRUCTION OF 2,5 m

ADDITIONAL EQUIPMENT:

Roll door opening system (Picture A)

Clips for foil (Picture B)

Connective clamps (Picture C)

Picture A



Picture B



Picture C



GREENHOUSE CONSTRUCTION OF 2,5 m OF WIDTH

*The pictures in this catalog are illustrative, and we can not guarantee that they will be identical in every detail to the product itself.

*The prices shown in this catalog are of informative character and because of fluctuations in the prices of raw materials and other factors of production, they do not have to match the price of the product at the customer's request. To get information on the current price, as well as the availability of the products in this catalog, contact Agroservis - Proizvodnja d.o.o. or their authorized representative.